


ELEVATION
DRIVEWAY INVERT - COMMERCIAL
 SCALE NTS

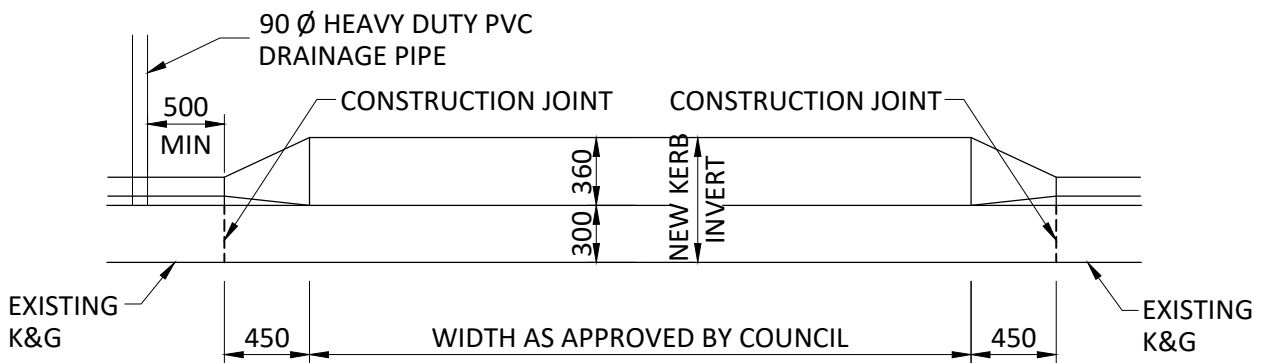


PLAN VIEW
DRIVEWAY INVERT - COMMERCIAL
 SCALE NTS

32MPa CONCRETE
 WITH 20mm
 AGGREGATE

MATCH TO
 EXISTING
 DRIVEWAY
 CROSSOVER

SL72 FABRIC
 CENTRALLY
 PLACED

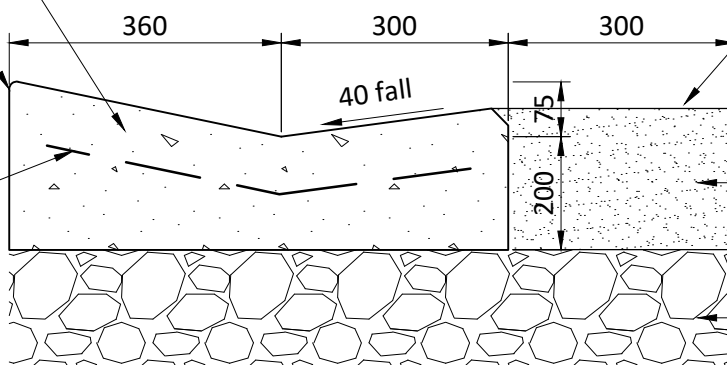

FINISHED ROAD LEVEL

MINIMUM 190mm PM1/20
 QUARRIED PAVEMENT
 MATERIAL COMPACTED TO
 98% MODIFIED DRY DENSITY

MINIMUM 100mm PM2/20
 RECYCLED PAVEMENT
 MATERIAL COMPACTED TO
 98% MODIFIED DRY DENSITY.
 (RECYCLED MATERIAL SHALL
 BE FREE FROM GLASS AND
 CERAMIC DEBRIS)

SECTION
DRIVEWAY INVERT - COMMERCIAL
 SCALE 1 : 10



DRAWING FILE
 LOCATION
 T:\AUTOCAD
 BLOCKS\2010\DRIVEWAY INVERT
 - COMMERCIAL WITH 300mm
 CHANNEL (M1246).dwg

COORDINATOR
 DESIGN
 B. MORIAS
 21.11.23

EDITED
 G. FERTEKLIS
 21.11.23
 DRAWN
 MY.W
 13.02.12
 DESIGNED
 MY.W
 13.02.12

STANDARD DETAIL
DRIVEWAY INVERT - COMMERCIAL
WITH 300mm CHANNEL

SCALE AS SHOWN

CITY OF CHARLES STURT

SHEET
1 of **1**

TRIM No.
12/30779

DRAWING No.
M1246