


ALIGN SIGN WITH LEADING
EDGE OF INSTALLATION



REFER TO D.I.T PAVEMENT
MARKING MANUAL PART 2.1.13 FOR
INVERTED PIANO KEY MARKINGS.
USE APPROVED THERMOPLASTIC
LINE MARKING.

INSTALL SIGN

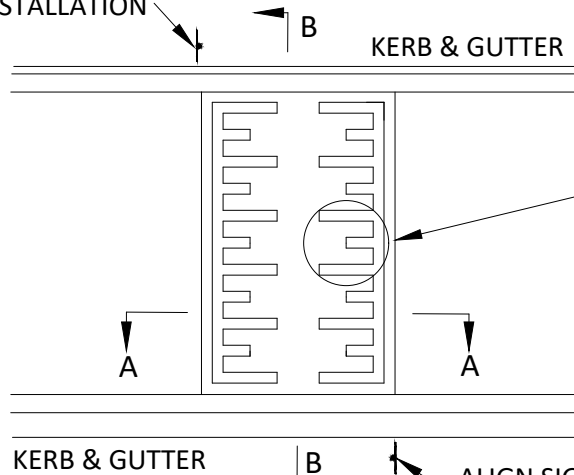

W5-10A


W8-2A

2000 ##

WHERE DISTANCE FROM PROPERTY BOUNDARY
TO EDGE OF SIGN IS LESS THAN 1.2m, SIGN
HEIGHT SHALL BE INCREASED TO 2.5m.


KERB & GUTTER B ALIGN SIGN WITH LEADING
EDGE OF INSTALLATION

PLAN

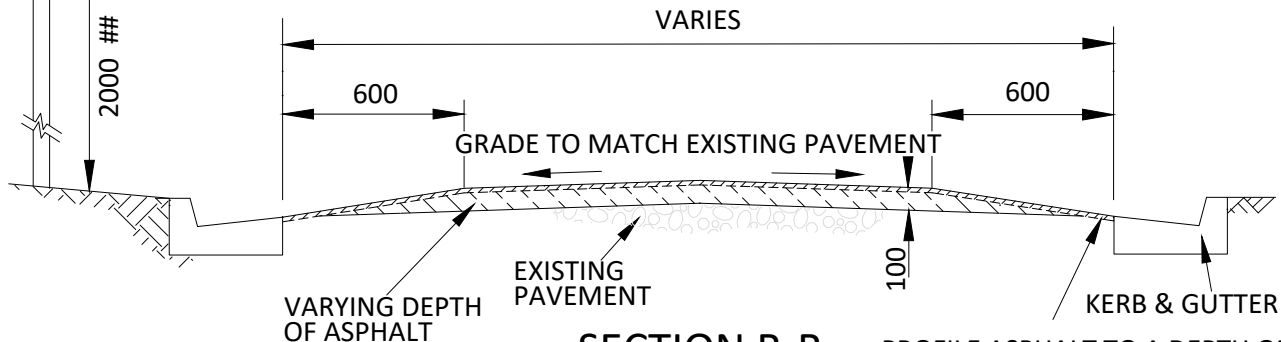

SECTION B-B

PROFILE ASPHALT TO A DEPTH OF
40mm AND LAY NEW WEARING
COURSE PER TABLE BELOW

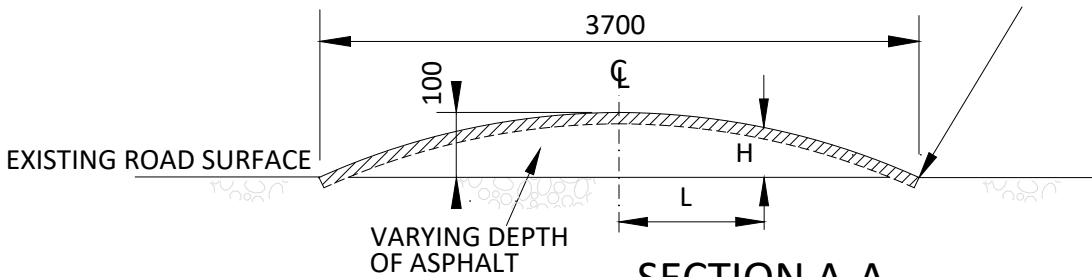

SECTION A-A

L:	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.85
H:	100	100	99	97	95	93	90	86	81	75	71	65	58	51	43	25	16	5	0

NOTE : LIGHTING FOR ROAD HUMPS TO BE IN ACCORDANCE WITH AS1158.3.1 SECTION 4.5

WATTS PROFILE ROAD HUMPS



DRAWING FILE
LOCATION
T:\AUTOCAD
BLOCKS\2010+WATTS PROFILE
ROAD HUMPS (M1494).dwg

COORDINATOR
DESIGN
B. MORIAS
21.09.23

EDITED
G. FERTEKLIS
21.09.23
DRAWN
C J SEROCKI
24.06.14
DESIGNED
C J SEROCKI
24.06.14

STANDARD DETAIL

WATTS PROFILE ROAD HUMPS

AS 1742.13

CITY OF CHARLES STURT

SHEET

1 of 1

TRIM No.

14/199807

DRAWING No.

M1494