


PLAN

***NOTE:**
DEPRESS GUTTER 50mm BELOW DESIGN WATERTABLE LEVEL FOR FULL WIDTH OF OPENING

LID AND FRAME TO BE MANUFACTURED ACCORDING TO AS3996 CLASS C

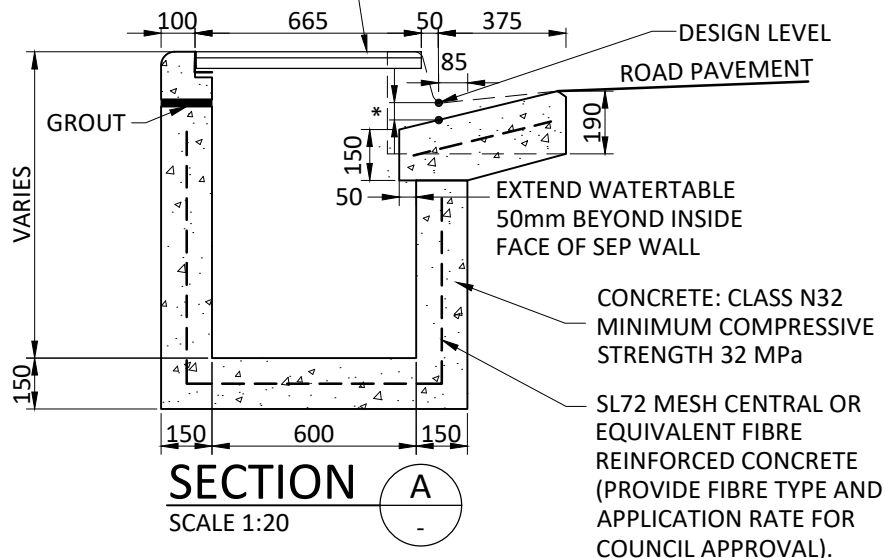

SECTION A
SCALE 1:20

SINGLE SIDE ENTRY PIT (UPRIGHT KERB AND WATERTABLE)

NOTES:

1. LID AND FRAME TO BE STANDARD MANUFACTURE OF TERRA FIRMA C-150 - TFC 5400 1000x640 WITH 25mm LINTEL REINFORCEMENT OR SIMILAR APPROVED. REINFORCEMENTS TO BE SL.72 FABRIC UNLESS APPROVED OTHERWISE.
2. REFER TO CCS STORMWATER PIT INSTALLATION DETAIL (M1591) FOR MINIMUM EXCAVATION BEDDING AND BACKFILL REQUIREMENTS.
3. FIBRE REINFORCED CONCRETE PITS SHALL BE USED FOR PROJECTS WITHIN 2KM OF COASTLINE.



DRAWING FILE LOCATION
T:\AUTOCAD BLOCKS\2010\SEP SINGLE 600 WIDE UPRIGHT K&G (M1191).dwg

COORDINATOR DESIGN
B. MORIAS
30.10.23

EDITED
G. FERTEKLIS
30.10.23
DRAWN
MY.W
13.02.12
DESIGNED
MY.W
13.02.12

STANDARD DETAIL

SINGLE SIDE ENTRY PIT

SCALE AS SHOWN

CITY OF CHARLES STURT

SHEET 1 of 1

TRIM No. 12/31022

DRAWING No. M1191